


GLADPCF64 LCD Adapter for the GLI2 board

GLI2 Board connections

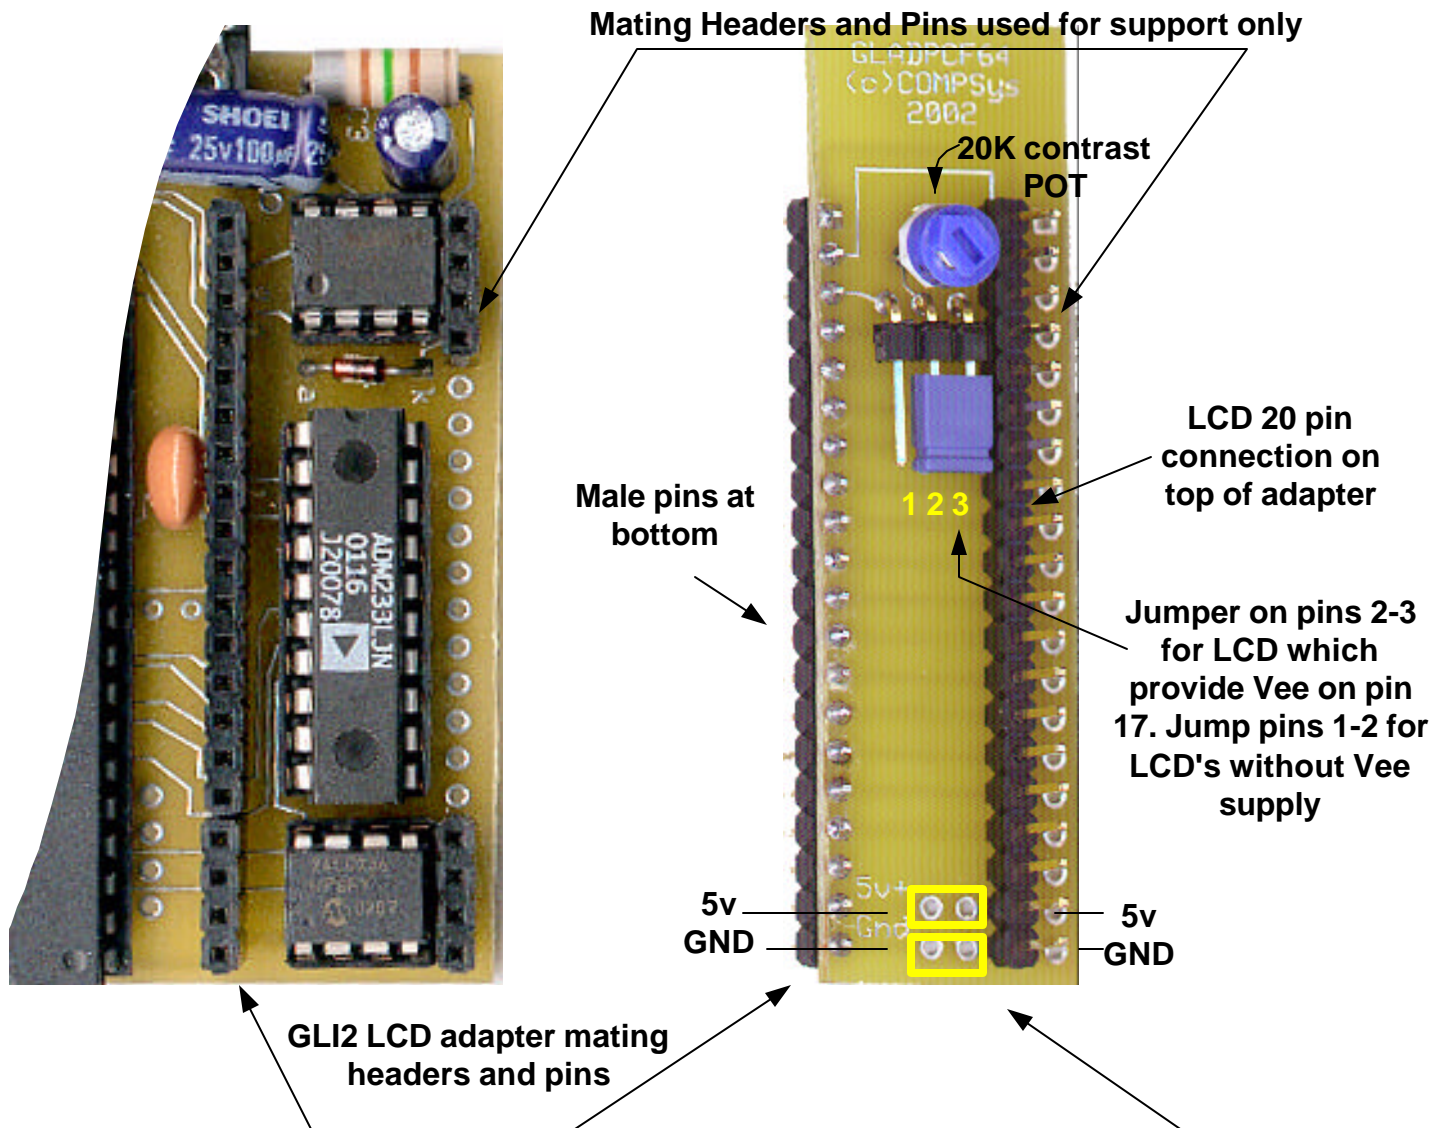

Optional Jumpers to provide 5v for backlight which draw less than 150ma.
PLEASE NOTE: Some LED backlights can draw large amounts of power (300-500ma), therefore a heat sink will be required with the GLI2 board's LM7805 voltage regulator to prevent it from overheating.