


Programming the Web Dev Board with MELab's EPIC Plus (tm) Programmer

MELab's EPIC Plus Programmer 2x5 header

Tip: A 10 pin IDC cable can be used by connecting the Dev Board's 5 pins to the outer row of the IDC connector.

To PIC pins
MCLR
Vdd
RB7
RB6
GND

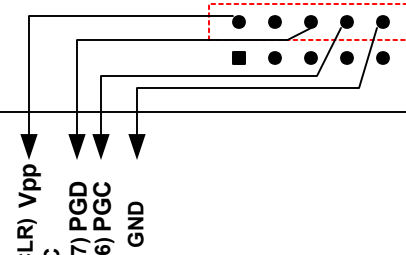

(MCLR) Vpp
N/C
(RB7) PGD
(RB6) PGC
GND

Apply Power when programming

ABSOLUTELY NEVER REVERSE POLARITY!

Power supply
7-16vdc

